


FEATURES:



INPUT:

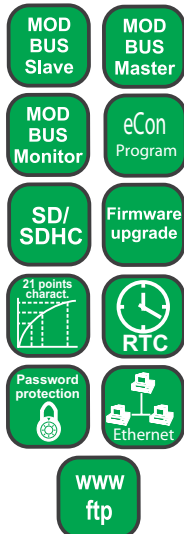

OUTPUT:



GALVANIC ISOLATION:




Matern d.o.o.
www.matern.si
tel: 02 608 90 10
e-mail: info@matern.si

✓ **NOTICE!**
NEW
functions!



- Universal measuring input.
- Version: standard, with SD card, **with Ethernet and internal memory.**
- Mathematical functions, i.a. **...**
- Individual characteristic (up to 21 points).
- 1 or 2 (option) alarm output.
- Built-in power supply of object transducers 24V d.c. (option).
- RS-485 interface Modbus RTU Slave, RTU Master or Monitor.
- **Possibility to record one measuring value via RS-485 Modbus Master.**
- Data recording in internal memory, up to 4MB or in external SD/SDHC card or **internal file**
- Transducer programmable using buttons, eCon freeware (through RS-485 or **Ethernet**) or any web browser (through Ethernet).
- Firmware upgradeable by the user.

EXAMPLE OF APPLICATION:

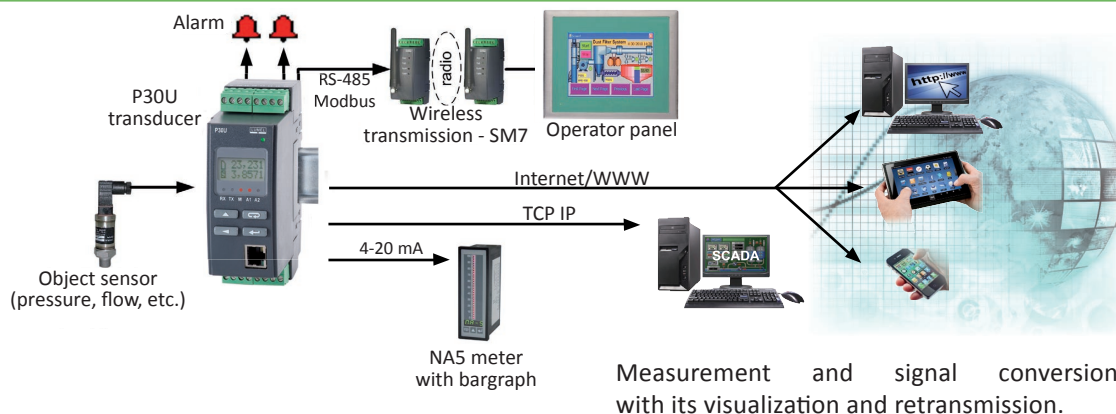

INPUT

Input type	Nominal measuring range Z	Coefficient k *	Input type	Range	Minimal sub-range with class preservation
Voltage 10 V	-10...10 V	4	Thermocouple J type	0...400 °C	1
Voltage 24 V	-24...24 V	5		-200...1200 °C	2
Current	-20...20 mA	10	Thermocouple K type	0...400 °C	1
Resistance 400	0...400 Ω	4		-200...1370 °C	2
Resistance 2000	0...2000 Ω	2	Thermocouple S type	0...1760 °C	2
Resistance 5500	0...5500 Ω	2	Thermocouple N type	-20...420 °C	1
Pt100	-200...850 °C	5		-200...1300 °C	1
Pt250	-200...600 °C	4	Thermocouple E type	-40...260 °C	1
	-200...850 °C	3		-200...1000 °C	2
Pt500	-200...180 °C	3	Thermocouple R type	0...1760 °C	2
	-200...850 °C	3	Thermocouple T type	-200...400 °C	1
Pt1000	-200...250 °C	4	Thermocouple B type	400...1800 °C	1
	-200...850 °C	2	RS-485	 In the Master mode of RS-485 interface, the transducer can poll up to 50 registers from one device, with implemented Modbus protocol, using RS-485 interface. In this mode, it is not possible to poll the transducer by another Master device.	
Ni100	-60...180 °C	1			
Ni1000	-60...150 °C	2			
Ni100-LG	-60...180 °C	1			
Ni1000-LG	-60...180 °C	2			
Cu100	-50...180 °C	1		 In the Master mode of RS-485 interface, the transducer can monitor activity of the RS-485 connection and react (accept as a measured value) to the value of the frame of the selected slave device. The transducer can analyze up to 50 registers from one device . In this mode, it is not possible to poll the transducer by another Master device.	
Voltage mV	-5...20 mV	1			
	-75...75 mV	4			
	-200...200 mV	4			

Accuracy class = 0.1 with the exception of N, E and T thermocouples, where accuracy class = 0.2 and S, R, and B thermocouples, where accuracy class = 0.5.

k* coefficient of narrowing the measuring range with keeping the accuracy class.

NOTE: Minimal sub-range with keeping the accuracy class is z/k (it is freely programmable).

Example: 10 Z = -10...10V;

k = 10

Z/k = 2 V, so the minimal sub-range can be e.g. -1...1 V; 0...2 V; 5...7 V

OUTPUT

Output type	Properties	Remarks
Analog	Current: 0/4...20 mA, load resistance $\leq 500 \Omega$ Voltage: 0...10 V, load resistance $\geq 500 \Omega$	accuracy class: 0.1
Relay	1 or 2 relays; voltageless contacts – NO – maximum load 5A 30V d.c., 250V a.c.	
Supplying output	24 V d.c. / 30 mA (option)	

DIGITAL INTERFACE

Interface type	Protocol	Baud rate
RS-485	Modbus RTU: 8N2, 8E1, 8O1, 8N1; Address 1...247	4.8, 9.6, 19.2, 38.4, 57.6, 115.2, 230.4, 256 kbit/s

EXTERNAL FEATURES

Overall dimensions	45 x 120 x 100 mm	
Weight	< 0.25 kg	
Protection grade	for housing: IP40/ IP30	for terminals: IP20
Readout field	LCD 2 x 8	


RATED OPERATION CONDITIONS

Supply voltage	85...253 V d.c. / a.c. (40...400 Hz) 20...40 V a.c. (40...400 Hz) or 20...60 V d.c.	Power consumption < 6 VA
Temperature	ambient: -25...+55°C	storage: -30...+70°C
Relative humidity	25...95 %	inadmissible condensation
Working position	any	

SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity	acc. EN 61000-6-2
	noise emissions	acc. EN 61000-6-4
Isolation between circuits	basic	acc. EN 61010-1
Pollution level	2	
Installation category	III	acc. EN 61010-1
Maximal phase-to-earth voltage	- for supply circuits 300 V - for other circuits 50 V	
Altitude above sea level	< 2000 m	

CONNECTION DIAGRAM

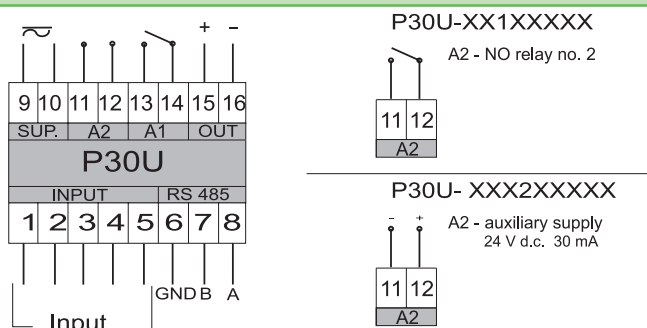

ORDERING

P30U -	X	XX	X	X	XX	X	X
Analog output:							
current (range 0/4...20 mA)	1						
voltage (0...10 V)	2						
Additional equipment:							
without any	0						
with external SD/SDHC slot	1						
with Ethernet interface and internal file system memory	2						
Addition output:							
NO relay, 5 A 30 V d.c., 250 V a.c.	1						
supply 24 V d.c. / 30 mA	2						
Supply:							
85...253 V a.c./d.c.	1						
20...40 V a.c., 20...60 d.c.	2						
Version:							
standard	00						
custom-made*	XX						
Language version:							
Polish	P						
English	E						
other*	X						
Acceptance tests:							
without extra requirements	0						
with an extra quality inspection certificate	1						
according to customer's request*	X						

ACCESSORIES:

SD CARD	
Capacity	Ordering code
1 GB	20-199-00-00023
2 GB	20-199-00-00025

Order example:

Code P30U-111100P0 means transducer execution with current output, slot for SD/SDHC card, with 2 alarm relays, 85...253 V a.c. / d.c. (40...400 Hz) power supply, standard version, Polish language, without extra requirements.

* after agreeing with the manufacturer.

SEE ALSO:




Temperature sensors



N30U meter



LUMEL - PROCESS software



For more information about LUMEL products please visit our website:
www.lumel.com.pl

Matern d.o.o.
www.matern.si
tel: 02 608 90 10
e-mail: info@matern.si