



Turbine meters of the Vision series

For low viscous and non-aggressive liquids



Features

- Excellent price performance ratio
- Small size
- Easy and fast installation
- Maintenance free
- · High operating pressure
- Installation in any position

Description

The liquid turbine meters of the series Vision are for the exact measuring of small quantities of liquids. The actual flow as well as the already passed flow can be measured.

The large number of pulses gives a good resolution. As the mass of the turbine are very small the response time is very short. It is not necessary to install a straight length of pipeline at the upstream side. The simple mechanical construction of the sensor Vision guarantees a long lifespan without any loss of accuracy. Pressure surges do not affect the measuring system.

Measuring principle

The rotor is turned by the fluid force in proportional to the flow. A hall generator supplies pulses, which can be utilized for digital or analogue signal processing. The generated pulses are specified as the k-factor.

Applications

For flow measurement of water, demineralized water, alkaline solutions, oils/edible oils, fuel/fuel consumption, fuel oil, beverage, water based liquids, etc.

Special for washmaschines, dish washers, coffee machines, laser cooling plants, solar solutions, backery machines, steam cooking machines in large kitchen plants, dialysis equipment, CD cleaning, irrigation plants, etc.

Electrical connections





Technical data

Туре	1005 2F66	2006 2F66	2006 4F44	2008 2F66			
Material		Trogamid					
Connection*	G 1/4"		G 3/8"				
Order code (with coupler socket acc. EN 60529)	56547-163-2F66	56510-163-2F66	56510-163-4F44	56500-163-2F66			
Order code for AMP Faston	=	56510-164-2F66	56510-164-4F44	56500-164-2F66			
Order code for 1m-cable	56547-165-2F66-1	56510-165-2F66-1	56510-165-4F44-1	56500-165-2F66-1			
Measuring rate I/min	0,1 - 2,5	0,5 - 5	1 – 10	0,5 - 7,5			
K-factor PPL	22.000	6900	3300	4700			
DN mm	5	6 6		8			
Туре	2008 4F44	2008 4F22	2008 4F17	3012 4F16			
Material							
Connection*		G 3/8"	G 3/4"				
Order code (with coupler socket acc. EN 60529)	56500-163-4F44	56500-163-4F22	56500-163-4F17	56422-163-4F16			
Order code for AMP Faston	56500-164-4F44	56500-164-4F22	56500-164-4F17	F			
Order code for 1m-cable	56500-165-4F44-1	56500-165-4F22-1	56500-165-4F17-1	56422-165-4F16-1			
Measuring rate I/min	1 - 15	1 - 25	2 - 35	5 - 65			
K-factor PPL	2200	1000	750	210			
DN mm	8	8	8	12			

Туре	1005 2F66	2006 2F66	2006 4F44	2008 2F66		
Material	Trogamid					
Connection*	NPT 1/4"					
Order code (with coupler socket acc. EN 60529)	56548-163-2F66	56512-163-2F66	56512-163-4F44	56502-163-2F66		
Article n° (AMP-Faston)	-	56512-164-2F66	56512-164-4F44	56502-164-2F66		
Order code for 1m-cable	56548-165-2F66-1	56512-165-2F66-1	56512-165-4F44-1	56502-165-2F66-1		
Measuring rate I/min	0,1 - 2,5	0,5 - 5	1 – 10	0,5 - 7,5		
K-factor PPL	22.000	6900	3300	4700		
DN mm	5	6	6	8		
Туре	2008 4F44	2008 4F22	2008 4F17	3012 4F16		
Material	Trogamid					
Connection*		NPT 3/4"				
Order code (with coupler socket acc. EN 60529)	56502-163-4F44	56502-163-4F22	56502-163-4F17	56423-163-4F16		
Order code (AMP-Faston)	56502-164-4F44	56502-164-4F22	56502-164-4F17	=		
Order code (with 1m cable)	56502-165-4F44-1	56502-165-4F22-1	56502-165-4F17-1	56423-165-4F16		
Measuring rate I/min	1 - 15	1 - 25	2 - 35	5 - 65		
K-factor PPL	2200	1000	750	210		
DN mm	8	8	8	12		
*Other connections: O-ring; H	ose nipple for Vision 2000					

Туре	1005 2F66	2006 2F66	2006 4F44	2008 2F66		
Material	Brass					
Connection	-			G 3/8"		
Order code (with coupler socket acc. EN 60529	-	-	-	47000-163-2F66		
Connection	-	•	=	NPT 3/8"		
Order code (with coupler socket acc. EN 60529	-	-	-	47001-163-2F66		
Measuring rate I/min	-	÷	-	2 - 8		
K-factor PPL	-	-	-	4200		
DN mm	-	÷	-	8		
Туре	2008 4F44	2008 4F22	2008 4F17	3012 4F16		
Material		Brass				
Connection	-	G 3/8"	-	-		
Order code (with coupler socket acc. EN 60529	-	47000-163-4F22	-	-		
Connection	-	NPT 3/8"	-	-		
Order code (with coupler socket acc. EN 60529	-	47001-163-4F22	-	-		
Measuring rate I/min	-	3 - 25	=	-		
K-factor PPL	-	1000	=	-		
DN mm	-	8	-	-		



Туре	1005 2F66	2006 2F66	2006 4F44	2008 2F66	2008 4F44	2008 4F22	2008 4F17	3012 4F16
Measuring rate I/min	0.1 - 2.5	0,5 - 5	1 – 10	0,50 - 7,5	1 – 15	1 – 25	2 - 35	5 - 65
K-factor PPL*	22.000	6900	3300	4700	2200	1000	750	210
Size mm	5	6	6	8	8	8	8	12
Viscosity range				0.8 - 16 mm ²	/sec (mpas)			
Accuracy				+/- 3% c	of value			
Repeatability				Better tha	an 0.5%			
Temperature range				-20 up to	+ 100 °C			
Operating pressure				25 bar	max			
Burst pressure		200 bar						
Electrical connection **	- AMP Faston 2.8/6.3 x 0.8 mmm							
	- Connection MICRO-EN 60529 and 3 flat plugs 2.8 x 0.5 mm (point plate)							
	- Cable connection: round cable 3xAWG 24 with free cable end							
Filter	20 to 40 micron recommended							
Power supply		5 - 24 VDC.						
Current consumption		Ca. 8 mA.						
Output signal	Pulses by open collector (NPN sinking).							
Output current	Max. 20 mA.							
Pull-up resistor	1 - 2.2 kOhm							
* PPL = Pulses per liter	* PPL = Pulses per liter							
** DIN connector MICRO	** DIN connector MICRO EN60529							

Pressure drop in bar for water (at 20 °C)


Type	1005 2F 66	2006 2F66	2006 4F44	2008 2F66	2008 4F44	2008 4F22	2008 4F17	3012 4F16
0,5 I / min	0.02							
1 I /min	0.05	~ 0	~0	~0	~ 0	~ 0	~ 0	
1,5 I / min	0.15							
2 I / min	0.25 *	~ 0	0.06	~0	0.05	~ 0	~ 0	
5 I / min		0.12	0.2	0.05	0.2	0.05	~ 0	0,00
10 I / min		0.4	0.7	0.2	0.4	0.17	~ 0.12	0,01
15 I / min		0.9		0.4		0.27	~ 0.25	0,02
20 I / min		1.3		0.7		0.48	~ 0.45	0,05
25 I / min						0.65	~ 0.60	0,07
30 I / min						-	~ 0.92	0,11
35 I / min								0,14
40 I / min								0,18
45 I / min								0,23
50 I / min								0,28
55 I / min								0,34
60 I / min								0,40
65 I / min								0,47
* Value applie	s to 2.5 I/min							

Display operation


Electr. connection	Coil for battery powered display required
Supply	2 - 5,5 VDC
Power consumption	Approx. 2,2 mA @ 2V
Output signal	Push - Pull
Output current	Max 30 mA




Dimensions (in mm)

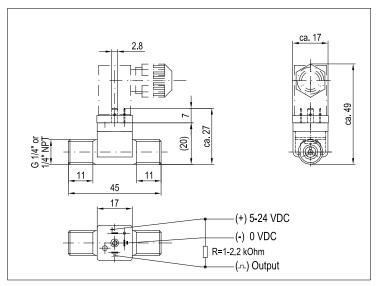


Example: Vision 1000 with DIN plug

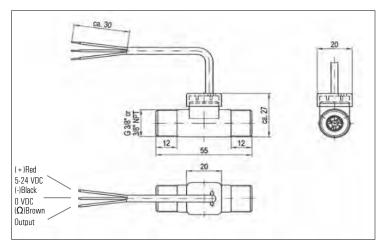


Example: Vision 2000 with round cable 3 x AWG 24

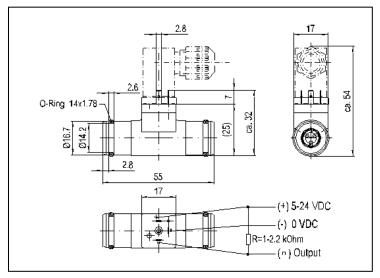

Example: Vision 2000 with 0-Ring

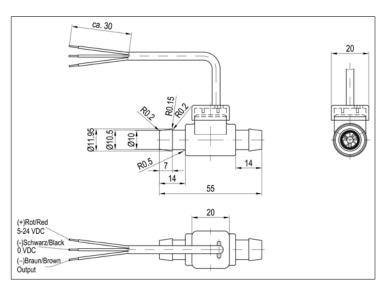

Example Vision 2000 with round cable 3 x AWG 24 and hose nipple

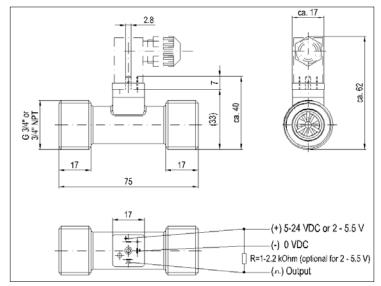

Example Vision 3000 with DIN plug



Displays for the VISION series

The ILR 701T, 750T series electronic register



Features

- Large six digit LCD display
- Display in liters, pints, quarts or gallons, freely programmable
- 11 digits, non-resettable lifetime totalizer and 6 digits, resettable totalizer
- Temperature range: -20 °C to +80 °C (-4 °F to +140 °F)
- Calibration factor saved in non-volatile memory
- 9 point linearization (ILR 750T, ILR 701T)
- Scalable pulse output and 4-20 mA output (ILR 750)
- Protection class IP65

Description

The electronic register module contains a microprocessor board powered by a lithium battery. It can be programmed to batch in liters, pints, quarts, or gallons and will totalize in liters or gallons. A calibration factor and unit of measure are programmed during factory test. Unlike mechanical registers, these units can be electronically recalibrated in the field when necessary. A 6-digit LC display, accurate to three decimal places, shows the exact amount of fluid that has passed through the meter. The entire register module is protected from normal wear and tear by a rugged, shock resistant housing.

Operation

Tubine meters have hall sensors that cause the turbine to send pulses to the register as rotates.

The register is in a sleep mode until it detects these pulses caused by fluid going through the meter. The micro-processor in the register then measures the flow and will display either

the batch totalization or the flow rate of the fluid going through the meter on the 6-digit display.

The registers batch totalizer is a 6-digit display with three places of resolution after the decimal point. If the total dispensed exceeds 999.999 then the display will shift and only 2 digits will be displayed after the decimal point, 9999.99 and will continue to shift to the maximum value of 999999. After reaching 999999 the batch totalizer will rollover to 0.000. The batch totalizer is reset to zero when the reset button is depressed.

The register also has a resettable totalizer that requires that the total and reset button both be depressed to reset (hold the "Total" button, then press the "Reset" button to reset this totalizer while resettable totalize is displayed). This would be used for multiple batch totalization purposes.

The register's life time totalizer is 11 digits and will either be in gallons or liters based on the unit of measure selected. Pushing and holding the total button while the life time totalizer is displayed will display the full 11-digit life time totalizer value.


Register model	Register features
ILR 701T standard register	Flow rate and totalizer display selectable in the programming menu
	Selectable unit of measure
	9 point linearization
ILR 750T pulse output	Scalable pulse output
+ 4-20mA output	Ability to set pulse output length
	Analog 4-20mA output
	Minimum and maximum values can be set for analog output
	• 9 point linearization




The electronic displays are available in two versions

Mounted version	For Vision 2000, Vision 3000 as battery-powered, on meter mounted display providing instant and total flow rate. ILR 701T: actual flow, total flow rate ILR 750T: actual flow, total flow rate 4-20 mA-output, scalable pulse output	
RF-Display (Remote reading via radio frequency))	For Vision 1000, Vision 2000, Vision 3000 as a wireless, battery-powered (1 x CR123A battery) display, with 2.4 GHz radio frequency, for remote reading of total flow rate over a 5 - 6 m range. Sender on top of turbine meter, receiver for wall mount. ILR 701T: total flow rate	
Remote	For Vision 1000, Vision 2000, Vision 3000 cable connection for remote reading ILR 701T: actual flow, total flow rate ILR 750T: actual flow, total flow rate 4-20 mA-output, scalable pulse output	The state of the s




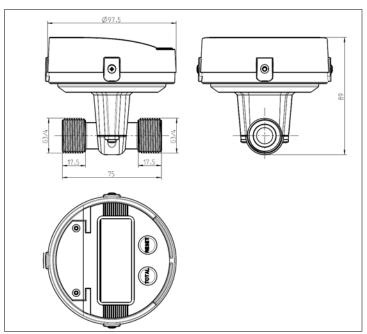

Example Vision 3000 with built up display

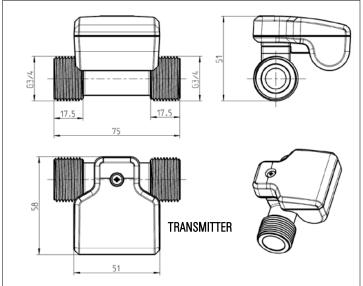

Wireless system consisting of transmitter and receiver (shown here the transmitter on the Vision 3000)

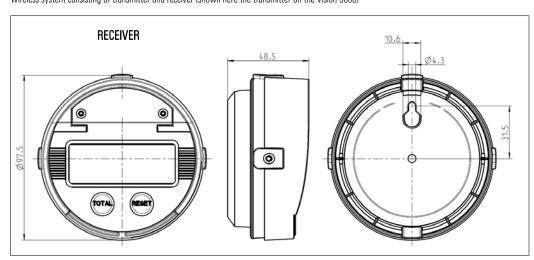

Wireless system consisting of transmitter and receiver (shown here the receiver) ${\bf r}$